

SUBMITTAL DATA convector model PL


Model PL Fully-Recessed Wall Mounted

Job Name and Location _____ Date _____

Architect _____ Engineer _____ Sheet _____ of _____

Contractor _____ Order No. _____

Submitted by _____

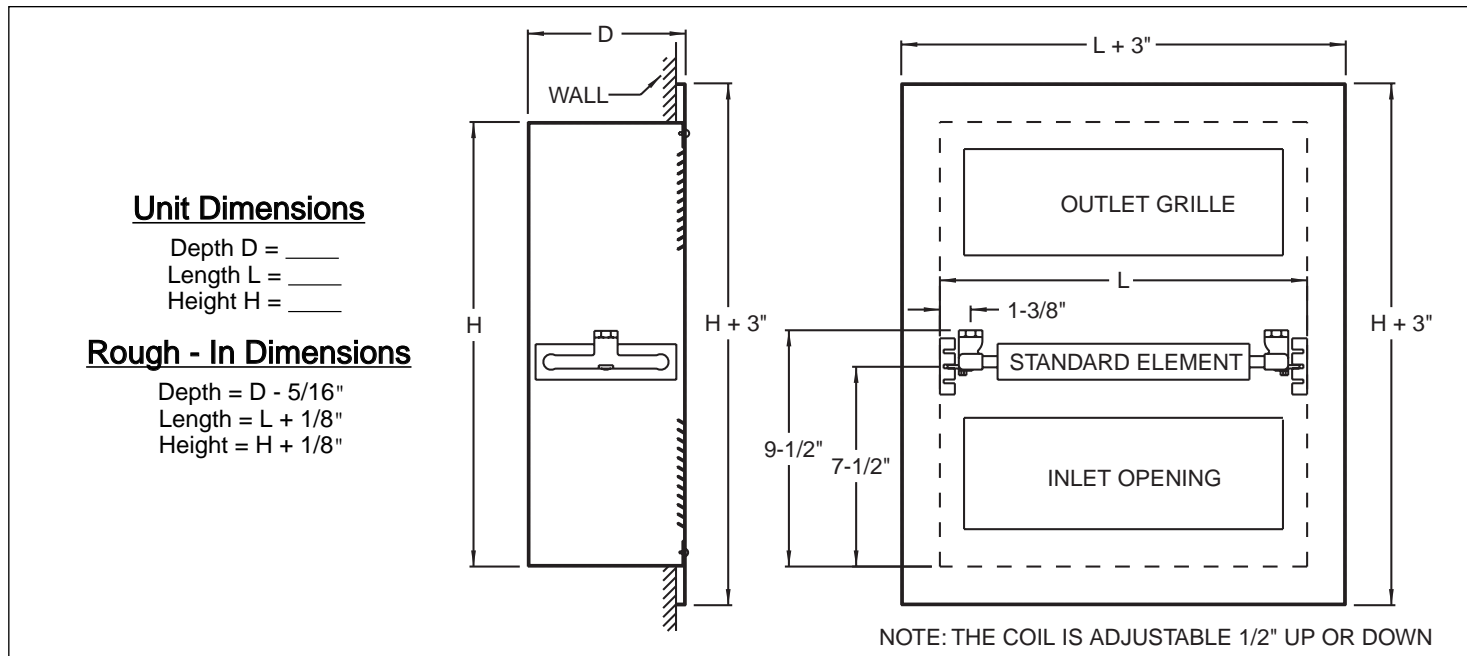

Heating Element

Copper tube mechanically fastened to 0.010" aluminum fins.
 Element to have a nominal depth of:
 4" w/ 2 tubes 6" w/ 3 tubes 6" w/ 4 tubes

Standard cast brass headers with top and bottom connections
 Optional reverse header connections

Enclosure Specifications

- Dimensions specified above
 Enclosure metal gauge:
 20 ga. liner, 18 ga. front (Standard)
 18 ga. liner, 18 ga. front 20 ga. liner, 14 ga. front
 20 ga. liner, 16 ga. front 18 ga. liner, 14 ga. front
 18 ga. liner, 16 ga. front 16 ga. liner, 14 ga. front
 16 ga. liner, 16 ga. front 14 ga. liner, 14 ga. front

- Enclosure Color (see Color Chart):
 Prime (Standard)
 Ivory Bronze Gray
 Beige White Dark Gray

Performance

Steam
Pressure: _____ psi
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Hot Water
Avg. Water Temp.: _____ °F
Water Flow Rate: _____ GPM
Entering Air Temp: _____ °F
Rating: _____ Btu/Hr

Options

- Dampers**
 None (Standard) Security Allen Key
 Standard Knob
- Grill**
 Louvered (Standard) Bar Grill - Aluminum (Inlet/Outlet)
 Perforated (Inlet/Outlet) Arched Inlet/Louvered Outlet
- Fasteners**
 Phillips (Standard) Spanner
- End Pockets**
 Left Hand Right Hand Left & Right Hand
- Insulation**
 None Back Sides, Back, & Top
- Overlap**
 4-Sided Overlap (Standard) 3-Sided Overlap

Other: _____

Model PL Fully-Recessed Wall Mounted

Access Doors

- Available in any of the standard numbered locations illustrated.
- Doors are 6" high x 6" wide for convectors with a height of 20" or greater. 4" high x 5" wide for convectors with a height less than 20".
- Hinged on the top of the convector with a piano type hinge.
- Located in end pockets on convectors with end pockets.
- Fasten with cam-type locking device.

Access Doors Location

- 3 4
- 1 2
- 5 6

Access Door Hardware

- Slot Head (Standard)
- Security Allen Key Latch
- Security Spanner Head Latch

