

**PERFORMANCE. VALUE. SELECTION.  
MEET RBI.**



**RBI®**  
RELIABLE. BOLD. INNOVATIVE.



## CONDENSING BOILERS

With efficiency levels reaching 99%, RBI's series of condensing boilers and water heaters ensure that efficiency this high is now within reach. And with unique condensing boilers available, we're sure that we have a high efficiency boiler option that will not only live up to the RBI name, but will tackle whatever challenge you throw its way.

### FlexCore

FlexCore Symmetrical Firetube boilers bring hydronic heating products to unprecedented levels of operating efficiency.

FlexCore was designed, developed and engineered by the experts at RBI.

Engineered for performance and longevity, FlexCore utilizes a perfectly temperature-balanced heat exchanger that provides not only the highest efficiencies but also a durability beyond that of any competitive firetube boiler on the market.

- 1,500 - 6,000 MBH
- 96.8% AHRI Certified
- Up to 99% Maximum Efficiency
- Symmetrical Firetube Heat Exchanger
- Primary/Secondary, Full Flow and Variable Flow Systems
- Full Modulation
- Patented "Turbo Pilot" 8,000 BTU/h Ignition
- HeatNet 3.0 Integrated Control Platform
- Touchscreen Programming & Diagnostics
- Modbus, LonWorks, BACnet BMS Integration
- Low NOx & CO
- Modern Jacket Design
- Premium Efficiency
- Superior Durability
- Easy Installation & Maintenance
- Versatile Footprint Fits Through 36" Door (ALL SIZES)
- PVC & Polypropylene (PP) Vent\*

\*Pending Certification



**All “firtube” boilers are designed to do the same thing: Heat water in an efficient manner.**

**That is where the comparison ends!**

***The RBI difference...***

FlexCore Symmetrical Firtube boilers are designed for the long haul with no tradeoffs in efficiencies. In order to operate at premium condensing efficiencies many factors come into play that can affect the design, performance and, as importantly, the durability.

FlexCore is engineered to provide perfect temperature symmetry around an ultra-high efficient core. Flue gas temperatures are even and a consistent temperature rise across all the tubes results in a unrivaled  $<5^{\circ}$  temperature difference across the heat exchanger with NO intra-tubular stresses as seen in many of today's competitive designs.

RBI “flexes” its strength by design. At its core is a piston-like heat exchanger engineered to eliminate the expansion and contraction stresses seen in today's boilers by creating a temperature balanced symmetrical upper tube sheet reminiscent of a diaphragm that absorbs the stresses from this piston-like motion at any water temperature delta.

Condensate is removed through FlexCore's linear design resulting in ultra-high efficiencies in a compact design with minimal corrosive effects.

FlexCore scrubs every last bit of heat from the combustion gases keeping stresses low and efficiencies high at all modulation rates, making FlexCore the most efficient boiler on the market today.




## **The Turbo Pilot<sup>®</sup>, Rugged & Reliable**

Another investment in the reliable performance that's built into the FlexCore is its patented Turbo Pilot system. RBI's Turbo Pilot is a industry proven ignition system with 1000's of units installed globally.

A robust 8,000 BTU/h ignition system, Turbo Pilot is far more reliable and durable than any hot surface ignition and direct spark system. The Turbo Pilot gives burner ignition a surefire, powerful ignition source even in applications with fluctuating gas pressures.

UV detection keeps system diagnostics informed about performance; a technician can also use the observation port to confirm spark/flame without removing the pilot or burner assembly.

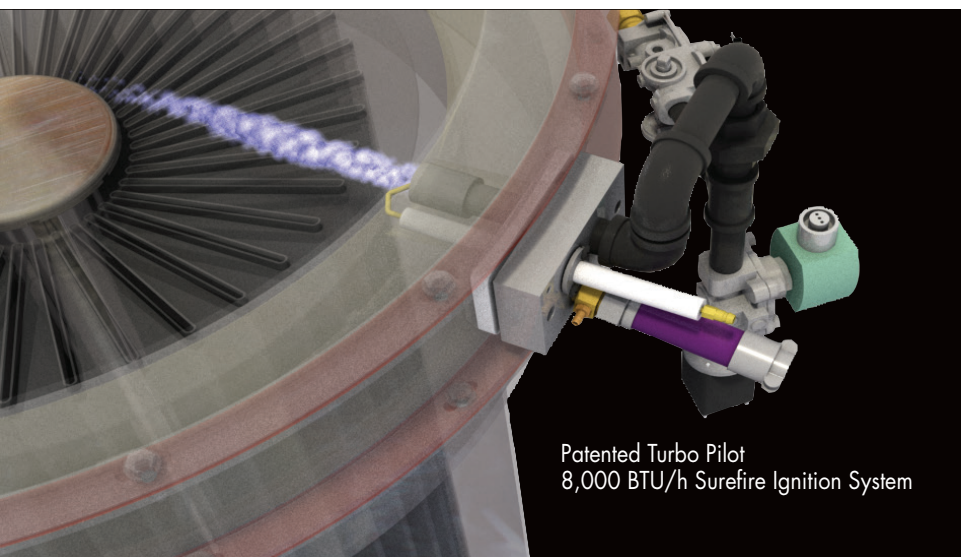

Patented Turbo Pilot  
8,000 BTU/h Surefire Ignition System



## Futera Fusion XLF

**2,500–4,000 | 5:1 Modulation**

As a fully condensing boiler and water heater, the Fusion XLF features an innovative design that brings superior power and energy efficiency with premium boiler performance and serviceability, all together in an unprecedented, industry-leading, small-package design.

Ideal for commercial boiler applications with low operating, return or make-up water temperatures, the Fusion XLF is capable of reaching efficiencies as high as 99% at full input. With full modulation up to 5:1 in a single unit, the firing system continuously varies the energy input to match the heating load without overfiring and wasting fuel – providing extremely high part-load efficiencies.

The Fusion XLF also features HeatNet 3.0, an intuitive boiler control system that monitors system characteristics and modulates boiler firing rates, maximizing turndown ratios and maintaining peak efficiency, regardless of the load.

- Up to 99% Efficiency
- Full Modulation with Continuous, 5:1 Turndown
- Sealed Combustion/Direct Vent
- Symmetrically Air/Fuel Coupled
- Commercial Combustion Controls
- HeatNet 3.0 Integrated Boiler Control Platform
- Gasketless Heat Exchanger Assembly





## Futera Fusion

**500–2,000 MBH | 4:1 Modulation**

Unlike most condensing boilers and water heaters that produce the highest efficiencies at the lowest inputs, the Futera Fusion can attain efficiencies as high as 99% at full input. The full modulation firing system continuously varies the energy input to precisely match heating load without overfiring or wasting fuel.

The Futera Fusion's heat exchanger was designed using a low-mass, gasketless primary heat exchanger with finned copper tube or Cupro-Nickel tubing – providing superior heat transfer, resistance to scaling and protection against thermal shock.

The condensing secondary heat exchanger is constructed from solid stainless steel and is designed to operate at the boiler's full flow rate. The unit operates in full condensing mode at all times, while a state-of-the-art temperature mixing system protects the boiler's primary heat exchanger. In addition, this design also offers a larger heat transfer surface area – more so than any competitive product currently available.

- Full Modulation with Continuous, 4:1 Turndown
- Symmetrically Air/Fuel Coupled
- HeatNet 3.0 Integrated Boiler Control Platform
- Commercial Combustion Controls
- Gasketless Heat Exchanger Assembly
- Sealed Combustion/Direct Vent



## POOL HEATERS

It's a well-known fact that pools are an investment – and these investments require maintenance. With that in mind, what's the use of a pool heater that will kick the proverbial bucket before the summer is over? RBI's commercial pool heaters are built to outlast the competition – and the busy summer season – year after year.





HeatNet 3.0 is an innovative, digital Boiler Management System that provides consistency and feedback through digital communication. By continuously monitoring several system characteristics, HeatNet 3.0 modulates boiler-firing rates to maximize turndown ratios and maintain peak efficiency – no matter the load.

HeatNet 3.0 doesn't just benefit stand-alone compatible RBI boilers; it is a valuable and cost-saving tool in operating a multi-boiler Master/Member network of up to 16 boilers. By functioning as a boiler management system, HeatNet 3.0 can incorporate a mixture of condensing boilers and non-condensing boilers to eliminate costly third-party, wall-mounted boiler control platforms.

- Digital Touchscreen Programming
- Lead/Lag Cascade (16 units)
- Adaptive Modulation
- Circular Pump/VFD/Valve Control
- BMS Integration
- Freeze Protection & Delta T Monitoring
- Hybrid/Base Load Capability
- Priority Boiler Control
- Domestic Hot Water Communication
- Web-based Remote Monitoring/Dashboard
- Diagnostics and Troubleshooting



## Infinite Energy<sub>2</sub>

### 199–1,000 MBH | Up To 20:1 Modulation

Infinite Energy<sub>2</sub> is available from 199 to 1000 MBH, providing flexible solutions for all of your heating and domestic hot water system needs. Utilizing state-of-the-art Radial Variable Circulation (RVC) stainless steel heat exchangers, IE<sub>2</sub> maximizes heat transfers and can achieve operating efficiencies up to 98%.

Using all of today's modern technologies, including pre-mix burners, modulating firing rates up to 20:1 single unit modulation and integrated cascade controls, IE<sub>2</sub> offers superior performance and application flexibility. Units are PVC, polypropylene and stainless steel vent capable and can be installed in multiple unit configurations using its onboard boiler control configuration – providing flexible modulation and maximum efficiencies.

- Up to 98% Ultra-High Efficiency
- RVC Stainless Steel Heat Exchanger
- PVC, PP and Stainless Steel Venting
- Intuitive Integrated Control Platform
- Multi-unit Cascade Communication
- Pre-Mix Burner Technology
- Low NOx and CO Emissions
- 3" Minimum Gas Pressure
- 160 PSI Working Pressure
- Integrated Condensate Neutralizer System

## NEAR-CONDENSING BOILERS

Delivering efficiencies up to 88%, RBI's selection of near-condensing boilers and water heaters are built for use in high efficiency applications that do not require condensing equipment. Capable of full modulation with reduced footprints, all RBI near-condensing models are constructed for simple installation and maintenance.

### Futera XLF

#### 2,500–5,000 MBH | 5:1 Modulation

RBI's Futera XLF gives you the power and flexibility to fit any commercial application. Available in 2,500 to 5,000 MBH, the Futera XLF has operating efficiencies up to 88% and turndown ratios of 5:1 for maximum energy optimization. The Futera XLF provides advanced, efficient performance with unmatched outputs, all within a compact footprint.

The Futera XLF features integral HeatNet 3.0 boiler control software that can act as a boiler management system, capable of networking up to sixteen units without requiring any external boiler control panel. With such advanced performance in a small space, even older boiler systems can benefit from the addition of contemporary efficiency for existing heating or domestic hot water systems. For new construction, the Futera XLF provides a modular configuration with an output unmatched by today's market.

- 88% Maximum Efficiency
- Cast Iron Headers (Boilers)
- Bronze Headers (Water Heaters)
- Full Modulation with Smooth, 5:1 Turndown
- Finned Copper Tube Heat Exchanger
- HeatNet 3.0 Integrated Boiler Management System
- Turbo Pilot Sure-Fire Ignition
- Multiple Venting Options
- Category I, II and IV Venting





## Futura III

**500–1,999 MBH | 4:1 Modulation**

Futura III, a near-condensing boiler and water heater, features full modulation with 4:1 turndown while supplying the precise amount of heat necessary to maintain desired building temperature by matching heating demand without overfiring or wasting energy.

These dependable, easy-to-service boilers feature rugged construction and sleek, stainless steel jacket design. With models ranging from 500-1999 MBH, all Futura III units come equipped with HeatNet 3.0 boiler control software, ensuring the highest operating efficiencies of any domestic boiler and hydronic heating system on the market.

- 88% Maximum Efficiency
- Full Modulation with 4:1 Turndown
- Cast Iron Headers (Boilers)
- Bronze Headers (Water Heaters)
- HeatNet 3.0 Integrated Boiler Management System
- Finned Copper Tube Heat Exchanger
- Symmetrically Air/Fueled Coupled
- Gasketless Heat Exchanger Assembly
- Stainless Steel Jacket Pane
- Category I, II and IV Venting







## Futura II

### 500–1,950 MBH | On/Off or 2-Stage

Futura II Series hot water supply boilers provide dependable performance with 85% efficiency levels, alongside industry-leading NOx levels of less than 10 ppm. With sizing that ranges from 500 to 1,950 MBH, the Futura II provides a high concentration of BTUs in a small footprint, making it an excellent choice for jobs where mechanical space is limited, as well as other modular, step-fired boiler applications.

The Futura II's compact, low maintenance boiler and venting flexibility allow for easy installation and service, making it the ideal unit for any hot water supply application. Futura II units have the ability to use room air for combustion and are also capable of drawing in air from the outside for sealed combustion. Units can be set up to vent vertically as Category I appliances or horizontally as Category III through a sidewall, making the Futura II ideal for buildings without chimneys, where roof penetrations cannot exist or on electric-to-gas conversions.

- Up to 85% Efficiency
- Advanced Diagnostic Panel
- Cast Iron Headers (Boilers)
- Bronze Headers (Water Heaters)
- Flame Safeguard Control
- One-Piece Header Design
- Stainless Combustion Chamber
- Vertical or Horizontal Venting Options
- 2-Stage Digital Operator



# Dominator

## 300–2,100 MBH | 2-Stage/4-Stage

With sizing from 300 to 2,100 MBH, the Dominator offers the ultimate flexibility in boiler and water heater application, all at a competitive price. With efficiencies of 85% and B vent approved, the Dominator has one of the highest efficiency levels available in the non-condensing boiler and water heater market. Capable of operating using mechanical room air for combustion or by drawing outside air directly as a sealed combustion product, the Dominator can vent combustion gases vertically or horizontally with factory equipped draft-inducer kits.

In applications where mechanical space is limited, the Dominator's stackable frame option allows units to be stacked two-high, adding valuable BTUs while keeping the footprint to the size of a single unit. In addition, the Dominator provides up to four stages of firing, allowing the boiler to match the heating load more closely.

And with built-in serviceability features, including a slide out heat exchanger, contractors no longer need to remove the heat exchanger for service or repair, which, when coupled with high efficiencies, makes the Dominator a cost-saving option for any boiler application.

- Up to 85% Efficiency
- 2 or 4-Stage Firing Modes (300 On/Off Only)
- Glass Lined Headers
- Optional Bronze Headers
- Finned Copper Tube Heat Exchanger – Two-Pass
- Stackable Frame (Seismic Approval up to Zone 4)
- Direct Vent (up to 35' Equivalent)
- Category I & III Venting







## Spectrum

### 100–399 MBH | On/Off or 2-Stage

Spectrum Series boilers and hot water heaters offer some of the highest thermal efficiencies possible in a non-condensing unit. With models ranging from 100 to 399 MBH, Spectrum's unique design and optional corrosion-resistant, stainless steel jackets make them ideal for indoor and outdoor installations in corrosive or harsh environments.

A unique feature within this MBH range, the Spectrum Series' diagnostic control panel allows for easy troubleshooting, and, when coupled with the self-diagnostic light package, makes the Spectrum Series easy to assess, maintain and service. All Spectrum Series gas-fired boilers and hot water heaters are constructed for application flexibility, and feature built-in draft diverters to lower the height of the unit and reduce installation costs.

- Glass Lined Headers
- Optional Bronze Headers
- Automatic Reset High Limit 100-200
- Manual Reset High Limit 250-400
- Built-in Draft Diverter
- Stainless Steel Burners
- Inlet & Outlet Thermometers
- Mounted and Wired Flow Switch
- Vent Damper (100-250 MBH Boilers Only)
- Self-Diagnostic Light Package
- Pump Control
- Electronic Ignition





## LCD Dominator

**400–2,300 MBH | On/Off or 2-Stage**

The LCD Dominator Series offers a budget-conscious, near-condensing, indoor/outdoor boiler and water heating unit that meets low NOx requirements, while maintaining superior performance and serviceability that RBI is known for. The LCD provides dependable performance in a wide range of rugged environments and process applications with a wide 400 to 2,300 MBH range.

At the heart of the unit is a sealed combustion chamber that provides the flexibility of using outside or mechanical room air for combustion. Priced in line with other atmospheric boilers, the LCD features smaller vent sizes, resulting in lower installation and operation costs.

The LCD features a robust, compact design that is constructed with high-quality materials, which, when paired with a proven pilot ignition system and a wide variety of venting options, makes this unit one of the most dependable boilers in the commercial boiler market.

- Finned Copper Tube Heat Exchanger
- On/Off, All Sizes 2-Stage, 600–2,300
- Glass Lined Headers
- Optional Bronze Headers
- Category I Vertical Venting
- Category III Thru-Wall Venting (up to 35')
- Slide-Out Heat Exchanger
- Stackable Frame  
(Seismic Approval up to Zone 4)



## NON-CONDENSING BOILERS

As boiler systems go, non-condensing engineering is a tried and true design. RBI's selection of high efficiency non-condensing boilers and water heaters run the gamut when it comes to cost savings, easy boiler installation and increased energy savings. And because they're backed by RBI, you can be sure that any non-condensing boiler system you install is built tough and built to last.





## 8800

### 2,800–4,000 MBH\* | On/Off or 2-Stage/4-Stage

RBI 8800 Series domestic boilers provide reliable, energy efficient operation in a wide variety of commercial boiler and hot water system applications. Ideal for hotels, schools, hospitals, laundries and car washes, the 8800 Series is the perfect non-condensing choice for applications that need large volumes of hot water. And with high quality construction, quiet operation and a variety of control options, the 8800 Series is an appropriate choice for hydronic heating applications with fast response, load matching and energy efficiency.

An integral, 2-pass heat exchanger ensures long-life performance and years of worry-free service. Uniquely designed to provide smooth heat transfer, the 8800 Series virtually eliminates standby losses as well as condensation problems.

\*8800 Series is not available for sale in Ontario, Canada.

- Gas Control – On/Off, 2-Stage, 4-Stage
- Reversible Headers and Left or Right Gas Train Connections
- Slide-Out Heat Exchanger and Burner Tray
- Interlocking Refractory
- Category I & III Venting
- Optional Cupro-Nickel Heat Exchanger





## 8900

**530–1,900 MBH\* | On/Off or 2-Stage/4-Stage**

RBI's 8900 Series non-condensing boilers and water heaters are the most durable and serviceable units on the market. With sizes ranging from 530 to 1,900 MBH, 8900 Series units are ideal for applications that require smaller units, such as car washes and office buildings. Alongside a 2-pass finned copper tube heat exchanger, all 8900 Series units are constructed with intermittent pilot ignition, adjustable high limit, and a 24V gas valve with either single-stage or two-stage firing.

Engineered with RBI's signature simple service design, 8900 Series boilers are constructed for easy boiler installation and maintenance, with all critical components easily accessible, including slide out burner trays and heat exchangers. All major components can be inspected or removed without disturbing boiler casing or breaching, simplifying any required service work.

\*The 8900 Series are not available for sale in the US and Canada markets due to DOE regulations.

- Glass Lined Headers
- Optional Bronze Headers
- 2-Pass Finned Copper Tube Heat Exchanger
- Slide Out Heat Exchanger and Burner Tray
- On/Off, 2-Stage/4-Stage
- 2 ½" Interlocking Combustion Chamber
- Front Mount 24V Controls
- FM/CSD-1 Gas Train Compliant
- Optional High & Low Gas Pressure Switches







## STORAGE TANKS

RBI storage tanks are designed to provide large volume, continuous or intermittent hot water supply while maintaining a constant outlet temperature. Ranging in size from standard 200 to 1,000 gallon capacities to custom-built 3,000-gallon units, RBI hot water storage tanks offer complete application flexibility and are the perfect complement to RBI's high efficiency boilers and water heaters.

Available in both jacket/insulated and bare configurations, all RBI hot water storage tanks are ASME certified and use the latest advancements in interior tank lining technology for maximum performance and durability. RBI's signature glass lining is specifically formulated for hot water applications and provides an ultra-durable, wear-resistant lining that minimizes the effects of high temperatures associated with water heating.

- ASME Certified HLW Stamp
- 2" True Dielectric NPT Fittings
- 125 PSI Certified Working Pressure
- Magnesium Anode Rods
- Heavy Gauge Steel Construction
- 2" Non-CFC Foam Insulation
- Durable Heavy Gauge Steel Jacket
- 5-Year/10-Year Warranty (Double Glass Lining Only)



# DIMENSIONS AND RATINGS

Models  
CK = Boiler

FlexCore — Dimensions and Ratings																	
Size	Input		Boiler Output		Unit Depth		Unit Width		Unit Height		Flue Vent		Air Intake	Connections		Shipping Weight	
											Cat IV Positive	Cat II					
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	UL Listed Stainless Steel**	Negative**		Gas	Water	Lbs	Kg
1500	1500	440	1426	418	70	1778	32	812.8	80	2031.9	6"	8"	8"	1-1/2"	3"	1555	705
2000	1999	586	1901	557	72.4	1838.3	32	812.8	80	2031.9	6"	10"	8"	1-1/2"	3"	1880	853
2500	2500	733	2397	703	72.4	1838.3	32	812.8	80	2031.9	8"	12"	8"	1-1/2"	3"	1955	887
3000	3000	879	2904	851	72.4	1838.3	32	812.8	80	2031.9	8"	12"	8"	1-1/2"	3"	2055	932
3500	3499	1025	3327	975	109.4	2770.7	34	863.6	80	2031.9	10"	12"	10"	2-1/2"	4"	3420	1551
4000	3998	1172	3802	1114	109.4	2770.7	34	863.6	80	2031.9	10"	12"	10"	2-1/2"	4"	3745	1699
4500	4500	1319	4329	1269	109.4	2770.7	34	863.6	80	2031.9	10"	14"	10"	2-1/2"	4"	3600	1633
5000	5000	1465	4795	1405	109.4	2770.7	34	863.6	80	2031.9	12"	14"	12"	2-1/2"	4"	3920	1778
6000	6000	1758	5808	1702	109.4	2770.7	34	863.6	80	2031.9	12"	14"	12"	2-1/2"	4"	4150	1882

\*\* Diameters may vary based on system design.

Models  
CB = Boiler  
CW = Water Heater

Futura Fusion XLF — Dimensions and Ratings*																	
Size	Input		Boiler Output		Unit Depth		Unit Width		Unit Height		Flue Vent		Air Intake	Connections		Shipping Weight	
											Cat IV Positive	Cat II					
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	UL Listed Stainless Steel**	PVC/PP Option		Gas	Water	Lbs	Kg
2500	2500	733	2350	689	84	2134	29-1/8	740	55-1/2	1410	8"	8"	8"	1-1/2"	1-1/2"	3"	2330
3000	3000	879	2820	826	84	2134	29-1/8	740	60	1524	8"	8"	8"	1-1/2"	1-1/2"	3"	2384
3500	3500	1026	3290	964	84	2134	29-1/8	740	64-1/2	1638	10"	10"	10"	2"	1-1/2"	3"	2614
4000	4000	1172	3760	1102	84	2134	29-1/8	740	69	1753	10"	10"	10"	2"	1-1/2"	3"	2726

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

\*\* Diameters may vary based on system design.

Models  
CB = Boiler  
CW = Water Heater

Futura Fusion — Dimensions and Ratings*																	
Size	Input		Boiler Output		Unit Depth		Unit Width		Unit Height		Flue Vent		Air Intake	Connections		Shipping Weight	
											Cat IV Positive	Cat II					
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	UL Listed Stainless Steel**	PVC/PP Option		Gas	Water	Lbs	Kg
500	500	147	476	139	59	1499	26-1/8	664	48-1/2	1232	7"	8"	8"	1"	2"	875	397
750	750	220	713	209	59	1499	26-1/8	664	55	1397	7"	8"	8"	1"	2"	900	408
1000	1000	293	952	279	59	1499	26-1/8	664	61-1/2	1562	7"	8"	8"	1"	2"	1000	454
1250	1250	366	1190	349	66-1/2	1689	31-1/8	791	55-1/2	1410	8"	8"	10"	1"	2-1/2"	1257	570
1500	1500	440	1430	419	66-1/2	1689	31-1/8	791	60	1524	8"	8"	10"	1-1/4"	2-1/2"	1350	612
1750	1750	513	1668	489	66-1/2	1689	31-1/8	791	64-1/2	1638	10"	10"	12"	1-1/2"	2-1/2"	1440	653
2000	1999	586	1906	558	66-1/2	1689	31-1/8	791	69	1753	10"	10"	12"	1-1/2"	2-1/2"	1500	680

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

\*\* Diameters may vary based on system design.

Models  
IB = Boiler  
IW = Water Heater

Infinite Energy 2 Series – Dimensions and Ratings*																	
Size	Input		Boiler Output		Unit Height		Unit Width		Unit Depth		Flue Vent		Air Intake	Connections		Shipping Weight	
	MBH	kW	MBH	kW	In	mm	In	mm	In	mm	3"	4"		Gas	Water	Lbs	Kg
199	200	59	184	54	45.7	1160	23.6	600	29	724	3"	3"	1"	1-1/2"		258	117
399	399	117	376	110	45.7	1160	23.6	600	34.8	885	4"	4"	1"	2"		356	162
500	500	147	472	138	45.7	1160	23.6	600	34.8	885	4"	4"	1"	2"		371	168
750	750	220	711	208	71.5	1815	23.6	600	35.3	896	6"	6"	1-1/4"	2-1/2"		539	245
1000	1000	293	952	279	71.5	1815	23.6	600	35.3	896	6"	6"	1-1/4"	2-1/2"		612	278

\* Ratings reflect boiler only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).





#### Models

MB = Boiler

MW = Water Heater

Futera XLF Series — Dimensions and Ratings*																		
Size	Input		Boiler Output		Unit Depth		Unit Width		Unit Height		Flue Vent <sup>(1)</sup>			Connections			Shipping Weight	
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	Cat I Negative	Cat II Negative	Cat IV Positive	Nat	LP	Water	lbs.	kgs.
2500	2500	733	2148	629	31-1/8	791	29-1/8	740	55-1/2	1410	10"	12"	8"	1-1/2"	1-1/2"	4"	1300	590
3000	3000	879	2622	768	31-1/8	791	29-1/8	740	60	1524	10"	12"	8"	1-1/2"	1-1/2"	4"	1400	635
3500	3500	1026	3052	894	31-1/8	791	29-1/8	740	64-1/2	1638	12"	14"	10"	2"	1-1/2"	4"	1510	685
4000	4000	1172	3480	1020	31-1/8	791	29-1/8	740	69	1753	12"	14"	10"	2"	1-1/2"	4"	1570	712
5000	5000	1465	4255	1247	31-1/8	791	29-1/8	740	78	1981	14"	14"	12"	2"	1-1/2"	4"	2000	908

\*Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

<sup>(1)</sup> Diameters may vary based on system design.

#### Models

MB = Boiler

MW = Water Heater

Futera III Series — Dimensions and Ratings*																		
Size	Input		Boiler Output		Unit Depth		Unit Width		Unit Height		Flue Vent <sup>(1)</sup>			Air Intake In.	Connections		Shipping Weight	
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	(Cat I) Negative	(Cat II) Negative	(Cat IV) Positive		Gas In.	Water In.	lbs.	kgs.
500	500	147	428	125	39	991	25-1/8	638	48-1/2	1231	N/A	6"	5"	8	1	2	600	272
750	750	220	641	188	39	991	25-1/8	638	55	1397	8"	6"	5"	8	1	2	695	315
1000	1000	293	853	250	39	991	25-1/8	638	61-1/2	1562	9"	7"	6"	8	1	2	735	333
1250	1250	366	1066	312	44	1118	29-1/8	740	55-1/2	1409	10"	8"	6"	10	1	2-1/2	850	386
1500	1500	440	1278	374	46-13/16	1189	29-1/8	740	60	1524	10"	8"	8"	10	1-1/4	2-1/2	927	421
1750	1750	513	1491	437	47-3/16	1199	29-1/8	740	64-1/2	1638	12"	10"	10"	12	1-1/2	2-1/2	928	421
2000	2000	586	1704	499	47-3/16	1199	29-1/8	740	69	1752	12"	10"	10"	12	1-1/2	2-1/2	1100	499

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

<sup>(1)</sup> Diameters may vary based on system design.

#### Models

FB = Boiler

FW = Water Heater

Futera II Series — Ratings*																			
Size	Input		Boiler Output		Unit Depth		Unit Width		Unit Height		Vent Dia. Standard		Vent Dia. Thru-Wall		Air Intake Dia.		Connections		
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	In.	mm	Nat.	LP	Water
500	500	147	425	125	22-5/16	567	21-9/32	540	43-1/32	1093	8	203	6	152	10	254	1"	1"	2"
750	750	220	638	187	22-5/16	567	21-9/32	540	49-17/32	1258	10	254	8	203	10	254	1"	1"	2"
1000	1000	293	850	249	22-5/16	567	21-9/32	540	56-1/32	1423	10	254	9	229	10	254	1-1/4"	1-1/4"	2"
1250	1250	366	1063	311	27-9/32	693	25-3/16	640	50-11/16	1287	12	305	10	254	12	305	1-1/4"	1-1/4"	2-1/2"
1500	1500	440	1275	374	27-9/32	693	25-3/16	640	55-3/16	1402	12	305	10	254	12	305	1-1/4"	1-1/4"	2-1/2"
1750	1750	513	1488	436	27-9/32	693	25-3/16	640	59-11/16	1516	14	356	12	305	14	356	1-1/2"	1-1/2"	2-1/2"
1950	1950	571	1658	486	27-9/32	693	25-3/16	640	64-3/16	1631	14	356	12	305	14	356	1-1/2"	1-1/2"	2-1/2"

Note: Certified South Coast Air Quality Management District (SCAQMD) Protocol Rule 1146.2; Ventura County APCD Rule 74.11.1

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org)

# DIMENSIONS AND RATINGS

## Models

DB = Boiler

DW = Water Heater

Dominator Series — Dimensions and Ratings*												
Size	Input		Boiler Output		Overall Length		Flue Vent Dim.		Ducted Air Dim.		Shipping Weight	
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	lbs.	kgs.
300	300	88	251	73	22-1/8	562	6	152	6	152	512	232
400	399	117	339	99	28-5/8	727	6	152	6	152	585	265
600	600	176	510	149	35-1/8	892	7	178	8	203	625	284
750	750	220	638	187	41-5/8	1057	8	203	8	203	710	322
900	900	264	765	224	48-1/8	1222	10	254	10	254	800	363
1050	1050	308	893	262	58-3/8	1483	10	254	10	254	915	415
1350	1350	396	1148	336	71-3/8	1813	12	305	12	305	975	442
1500	1500	440	1275	374	77-7/8	1978	14**	356	12	305	1015	460
1950	1950	572	1658	486	97-3/8	2473	14**	356	12	305	1285	583
2100	2100	616	1785	523	103-7/8	2638	14**	356	12	305	1300	590

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

\*\* 14" oval to round transition piece.

## Models

LB = Boiler

LW = Water Heater

LCD Dominator Series — Dimensions and Ratings*															
Size	Input		Boiler Output		Overall Length		Flue Vent Dim.		Connections			Ducted Air Dim.		Shipping Weight	
									Gas		Water				
	MBH	kW	MBH	kW	In.	mm	In.	mm	Nat.	LP		In.	mm	lbs.	kgs.
400	399	117	327	96	28-5/8	727	6	152	3/4"	3/4"	1-1/2"	6	152	515	234
600	600	176	492	144	35-1/8	892	7	178	1"	1"	2-1/2"	8	203	635	288
750	750	220	615	180	41-5/8	1057	8	203	1"	1"	2-1/2"	8	203	710	322
1050	1050	308	861	252	58-3/8	1483	10	254	1-1/4"	1-1/4"	2-1/2"	10	254	915	415
1200	1200	352	984	288	71-3/8	1813	12	305	1-1/4"	1-1/4"	2-1/2"	12	305	972	441
1480	1480	434	1214	356	71-3/8	1813	12	305	1-1/2"	1-1/2"	2-1/2"	12	305	1000	454
1650	1650	483	1353	396	77-7/8	1978	14**	356**	1-1/2"	1-1/2"	2-1/2"	12	305	1075	488
1970	1970	577	1615	473	97-3/8	2473	14**	356**	1-1/2"	1-1/2"	2-1/2"	12	305	1270	577
2300	2300	674	1886	553	103-7/8	2638	14**	356**	2"	2"	2-1/2"	12	305	1280	581

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

\*\* 14" oval to round transition piece.

## Models

SB = Boiler

SW = Water Heater

Spectrum Series — Dimensions and Ratings*													
Size	Input		Boiler Output		AFUE%	Unit Width		Vent Width		Connections		Shipping Weight	
	MBH	kW	MBH	kW		In.	mm	In.	mm	Gas	Water	lbs.	kgs.
100	100	29	82	24	82	16-1/8	410	5	127	1/2"	1-1/2"	193	88
150	150	44	123	36	82	19-1/2	495	6	152	1/2"	1-1/2"	200	91
200	199	58	163	49	82	22-7/8	581	7	178	1/2"	1-1/2"	235	107
250	250	73	205	60	82	26-1/4	667	8	203	3/4"	1-1/2"	250	113
300	301	88	247	72	82	29-5/8	752	8	203	3/4"	1-1/2"	265	120
350	350	103	286	84	82	33	838	9	229	3/4"	1-1/2"	285	129
400	399	117	324	95	81	36-3/8	924	10	254	3/4"	1-1/2"	300	136

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).



Models  
HB = Boiler  
HW = Water Heater

### 8800 Series — Dimensions and Ratings\*

Size	Input		Boiler Output		Dim. A		Flue Vent		Dual Exhaust Vent		Connections			Shipping Weight	
							Dim. B		Dim. C		Gas		Water		
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	Nat.	LP			
2800	2800	820	2296	673	73	1854	26	660	18	457	2"	1-1/2"	3"	1480	671
3200	3200	938	2624	769	82	2083	28	711	20	508	2"	2"	3"	1610	730
3600	3600	1055	2952	865	91	2311	30	762	22	559	2"	2"	3"	1720	780
4000	4000	1172	3280	961	100	2540	30	762	22	559	2"	2"	3"	1900	862

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

Note: 8800 Series is not available for sale in Ontario, Canada.

Models  
HB = Boiler  
HW = Water Heater

### 8900 Series — Dimensions and Ratings\*

Size	Input		Boiler Output		Dim. A		Flue Vent		Dual Exhaust Vent		Connections			Shipping Weight	
							Dim. B		Dim. C		Gas		Water		
	MBH	kW	MBH	kW	In.	mm	In.	mm	In.	mm	Nat.	LP			
530	530	155	429	126	33	838	10	254	—	—	1"	1"	2-1/2"***	480	218
735	735	215	595	174	42	1067	14	356	—	—	1"	1"	2-1/2"***	560	254
840	840	246	680	199	46-1/2	1181	14	356	10	254	1"	1"	2-1/2"***	605	274
1050	1050	308	851	249	55-1/2	1410	16	406	12	305	1-1/4"	1-1/4"	2-1/2"	700	318
1260	1260	369	1021	299	64-1/2	1638	16	406	12	305	1-1/4"	1-1/4"	2-1/2"	790	358
1470	1470	431	1191	349	73-1/2	1867	18	457	14	356	1-1/4"	1-1/4"	2-1/2"	826	375
1900	1900	557	1539	451	91-1/2	2324	20	508	16	406	1-1/2"	1-1/2"	2-1/2"	1000	454

\* Ratings reflect boilers only. For boiler efficiency information please visit [www.ahridirectory.org](http://www.ahridirectory.org).

\*\* 2-1/2" x 2" reducing fitting installed.

Note: The 8900 Series are not available for sale in the US and Canada markets due to DOE regulations.

### Storage Tanks — Bare — Vertical Glass Lined

Model	Capacity (Gals.)	Height	Width
V200B	200	79-1/2"	28"
V240B	240	89"	30"
V310B	310	82"	36"
V435B	435	85"	42"
V505B	505	97"	42"
V675B	675	100"	48"
V860B	860	124"	48"

### Storage Tanks — Jacketed — Vertical Glass Lined

Model	Capacity (Gals.)	Height	Width
V200J	200	78"	32"
V240J	240	93"	34"
V310J	310	86"	40"
V435J	435	89"	46"
V505J	505	101"	46"
V675J	675	104"	52"
V860J	860	128"	52"





**A MESTEK COMPANY**

**260 North Elm St.  
Westfield, MA 01085  
TEL: (413) 564-5515  
FAX: (413) 568-9613**

**7555 Tranmere Drive  
Mississauga, Ontario  
Canada L5S 1L4  
TEL: (905) 670-5888  
FAX: (905) 670-5782**

**[www.rbiwaterheaters.com](http://www.rbiwaterheaters.com)**

